


Drain Minder II Automatic Drain Timer P/N 144-0001



- The Drain Minder Provides an air pilot signal to control up to 5 Moisture Minder® automatic Drain Valves.
- Maximize your air system performance by continuously draining condensate from receivers, aftercoolers, intercoolers, air dryers, separators, drip legs, etc.
- Drains Can be located 100 ft from controller
- Drains can be installed in explosion proof rooms since pilot signal is air.
- Easy installation

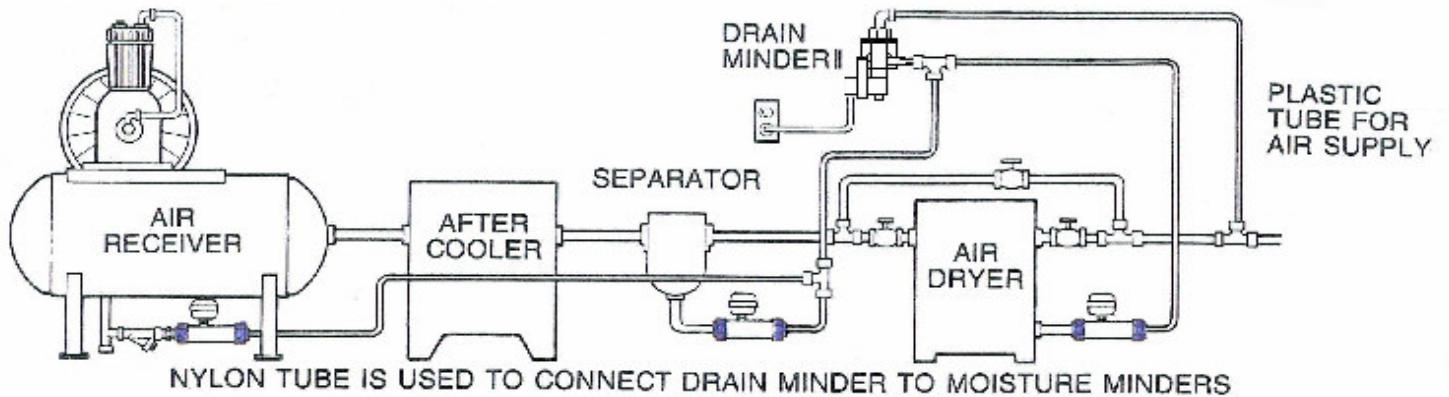

The Drain Minder II controller is installed in the typical system by teeing into a filtered air supply and connecting the supply line to the inlet side of the controller (150 PSI max).

The controller can be mounted to the wall or other stationary surface with mounting brackets.