




Toll Free: 1-800-782-5752  
Fax: 763-295-6601  
E-mail: rfrucci@gosuburban.com  
www.gosuburban.com

## Sidewinder® Sleeve: High Visibility Yellow

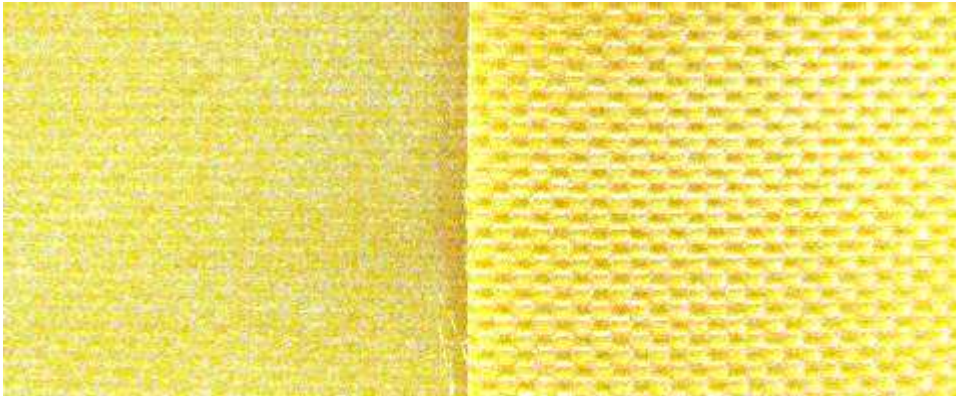

Coated side on Left—Uncoated on Right

### **High Visibility Yellow Material Features**

- Material: 210 Denier Cordura with  
7.0 Mil urethane coating outside  
0.5 Mil urethane coating inside  
Meets MIL-C-83489, FED-STD-191A, MIL-STD-810F
- Temperature Range: -60° to +250° F
- Abrasion: Very Good; Tough & Lightweight  
Meets ISO 6945 Specifications
- Puncture/Tear: Fair to Good; resists punctures
- UV protection: Excellent; meets EN13758-1, top rating of 80 New
- Chemicals: Very good resistance to water, petroleum products, and  
detergents
- Wicking: Excellent; Non wicking
- Welding Sparks/Spall: NOT Recommended

### **Typical Applications:**

Umbilical bundling, covering long lengths of hose or cable that lay on the ground. The high optical visibility and low physical weight make it very good for dragging abrasion protectants with good slip characteristics.